



# 8T(M) MECHANICAL WEDGE

## SPECIAL FEATURES

- ONLY REQUIRES AN ACCESS GAP OF 6 MM
- ROBUST LIGHTWEIGHT TOOL – JUST 7 KILOS
- PORTABLE
- EASY TO USE
- ROTATING SWIVEL HANDLE
- UNIQUE MECHANICAL RETRACTION
- VERSATILE – CAN BE USED RESTING ON SIDE
- SLIM, SMOOTH-LINE DESIGN
- TORQUE OF 150 FT.LBS. GENERATES 8 TONNES OF SEPARATING FORCE
- REQUIRES MINIMUM MAINTENANCE


*The Flange Alignment  
&  
Spreading System*






**UNIQUE INTERLOCKING FIRST STEP ENHANCES SAFETY, GIVING SECURE HOLDING AT THE TIPS. THIS MEANS THE FULL FORCE OF 8 TONNES CAN BE GENERATED ON THE FIRST, AS WELL AS THE OTHER STEPS.**

**22MM/ 7/8" RATCHET SPANNER**



**WEDGEHEAD WITH ROTATING SWIVEL HANDLE**

**SAFETY BLOCK**




### **THE 10T(I) INTEGRAL HYDRAULIC WEDGE**

THE PUMP AND CYLINDER ARE MOUNTED ONTO THE WEDGEHEAD, CREATING A COMPACT, SELF-CONTAINED SPREADING WEDGE.

### **THE 10T(E)**

*(SHOWN WITH STEPPED BLOCK ACCESSORY)*

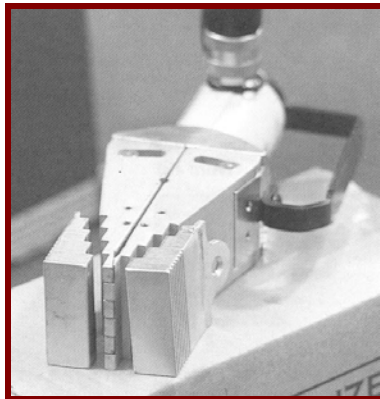


### **THE 10T(E) HYDRAULIC WEDGE**

IS AVAILABLE IN 3 KITS  
- MINI - STANDARD - MAXI -



**THE STEPPED BLOCK** (SOLD AS SEPARATE ACCESSORY) CAN BE ATTACHED TO THE JAWS OF THE WEDGE (AS ILLUSTRATED) TO INCREASE THE SPREADING CAPABILITY **BUT** WITH LESSER PENETRATION OF THE JOINT. THE SPREAD IS INCREASED BY 18MM/3/4". **THE STEPPED BLOCK** CAN BE ATTACHED TO:

- **THE 10T(E) HYDRAULIC WEDGES;**
- **THE 10T(I) INTEGRAL HYDRAULIC WEDGE; AND**
- **THE 8T(M) MECHANICAL WEDGE**



Product Development is constantly taking place and dimensions may change without prior notice.



**OFFICE LOCATIONS:**

- PASADENA, TEXAS • CLAYMONT, DELAWARE •
- NEW IBERIA, LOUISIANA •
- SARNIA, ONTARIO • EDMONTON, ALBERTA •

Toll Free: (800) 779-2658 Phone: (713) 920-2400 Fax No.: (713) 920-2313

[www.integratetechnologies.com](http://www.integratetechnologies.com)