

SU-XL SERIES RATCHET WRENCH



A Square drive Ratchet design offers a cost efficient option to handle a wide range of bolting make-up and breakout need.

The SU-Series ratchet employs a "patented design" which increases accuracy and reduces the number of moving parts.

The standard SU-Series tool capacities range from 100 to 50,000 foot pounds of torque using a 10,000 psi hydraulic pump.

FEATURES

- **Square Drive** - For use with all standard size square drive impact sockets. Easily shifts from make-up to breakout without disassembly.
- **TL T-6-XL** - Series body made of durable, high strength, lightweight, aircraft alloy
- **Unibody** - Eliminates pinch points,
- **Slotted Piston Rod** - maintains 90° relationship between piston rod and nut.
- **Anti-Reverse Pawl** - Holds rotational windup to allow achieving of required torque.
- **Calibrated** - Every tool is tested and calibrated to +/- .03 accuracy
- **Pawl Release** - Anti-reverse pawl release mechanism allows manual release of tool if binding occurs.
- **Reaction Member** - 360° rotation made of lightweight alloy-Ratchet can be used with reaction member
- **Nickel Coated** - Resists corrosion
- **360° Swivel Fittings** - Allow hose movement without binding
- **Light/Ergonomic** - Reduces operator fatigue
- **Warrenty** - comes with a 3 year - 2 Tier warranty that is the best standard warranty on the market.



SERVICE

RENTAL


SALES

Bolting The World's Critical Joints

1-800-779-2658

www.integratechnologies.com

SU-XL SERIES RATCHET WRENCH

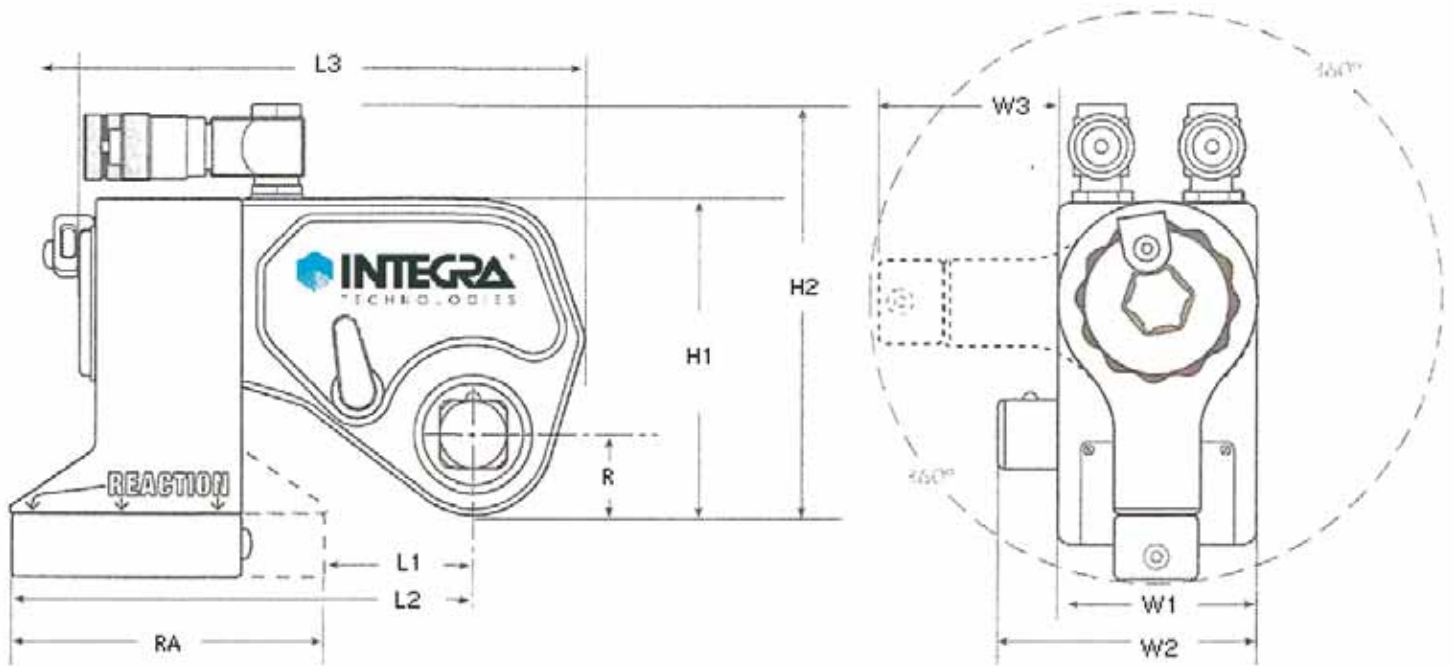

SU-XL Series	Square Drive	Max ft. Lbs @ 10,000 psi	Weight*	Reaction Area-RA	Length L1	Length L2	Length L3	Radius R	Height H1	Height H2	Width W1	Width W2	Width W3
SU-1XL	1/2"	1,400	5.25 lbs	3.685"	1.587"	5.252"	5.978"	1.200"	4.100"	5.725"	1.980"	2.730"	2.200"
SU-3XL	1"	3,300	11.25 lbs	5.335"	1.865"	7.200"	7.970"	1.260"	4.870"	6.520"	2.775"	3.600"	3.172"
SU-6XL	1-1/2"	6,000	17.20 lbs	5.460"	2.150"	7.610"	8.410"	1.953"	6.250"	7.850"	3.000"	4.475"	3.501"
SU-11XL	1-1/2"	11,300	29.90 lbs	6.500"	2.245"	8.745"	9.500"	2.062"	7.375"	9.125"	3.900"	5.350"	4.982"
SU-20XL	2-1/2"	20,100	62.00 lbs	7.525"	3.460"	10.375"	11.600"	3.000"	9.184"	10.784"	4.950"	7.450"	5.557"
SU-30XL	2-1/2"	30,200	75.00 lbs	7.525"	3.460"	10.875"	11.725"	3.125"	9.777"	11.377"	5.875"	8.375"	5.555"

*Weight includes tool, reaction member and square drive

SU-XL Series	Square Drive	Max ft. Lbs @ 10,000 psi	Weight*	Reaction Area-RA	Length L1	Length L2	Length L3	Radius R	Height H1	Height H2	Width W1	Width W2	Width W3
SU-45	2-1/2"	46,200	145.00 lbs	7.425"	7.337"	12.537"	13.312"	3.000"	11.000"	12.600"	5.750"	8.250"	5.500"
SU-60	2-1/2"	60,000	295.00 lbs	8.781"	5.887"	14.868"	16.000"	3.750"	14.000"	15.600"	7.250"	9.750"	5.750"

*Steel Casting

Bolting The World's Critical Joints

1-800-779-2658

www.integratechnologies.com