

DUAL PORT SUBSEA HYDRAULIC NUT SPLITTER




INTEGRA's Subsea Hydraulic Nut Splitter offers a reliable and effective solution to the removal of seized and corroded nuts.

In addition to standard features normally associated with hydraulic nut splitters, the SEASTallion™ Nut Splitter also provides the following additional benefits:

FEATURES

- Triple Edge Disposable Cutting Blade
- Blade Positioning Scale to Eliminate Bolt Damage
- Cutting Depth Adjusted by Rotating the Cylinder
- Size Range from 3/4" to 3-1/2" Bolt Diameter
- Designed to fit BS 1560 / ANSI B16.5 Flanges
- Versatile, Reliable and Trouble Free Operation
- Maximum Load Generated at 10,000-psi
- Energized by a 10,000-psi Pump
- Dual Action Drastically Reduces Lag Time between Cuts

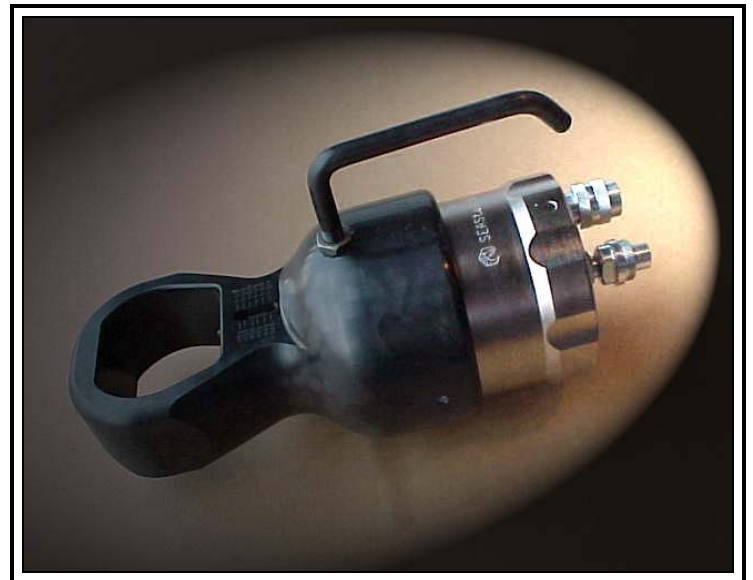

SERVICE

RENTAL

SALES

Bolting and Machining the World's Critical Joints



1-800-779-2658

www.integratechnologies.com

DUAL PORT SUBSEA HYDRAULIC NUT SPLITTER



SPECIFICATIONS AND DIMENSIONAL DATA

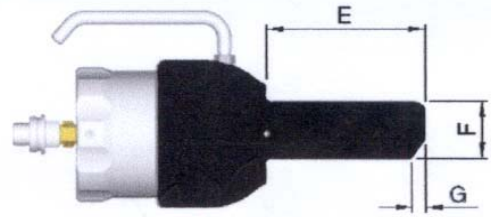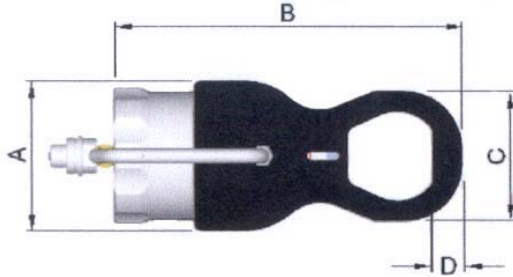

| Tool Ref | BOLT DIAMETER | | 'A' IN | 'B' IN | 'C' IN | 'D' IN | 'E' IN | 'F' IN | 'G' IN | APPROX. WT. LB. |
|----------|---------------|--------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--------------------|
| | IMPERIAL | METRIC | | | | | | | | |
| ENSI-1 | 3/4" | M20 | 4.10 | 8.97 | 2.99 | .71 | 4.10 | 1.60 | .35 | 14.8 |
| | 7/8" | M22 | | | | | | | | |
| | 1" | M24 | | | | | | | | |
| | | M27 | | | | | | | | |
| ENSI-2 | 3/4" | M20 | 4.10 | 9.41 | 3.54 | .83 | 4.33 | 1.60 | .39 | 15.2 |
| | 7/8" | M22 | | | | | | | | |
| | 1" | M24 | | | | | | | | |
| | 1-1/8" | M27 | | | | | | | | |
| | | M30 | | | | | | | | |
| ENS2-1 | 1-1/8" | M30 | 5.43 | 12.01 | 4.02 | .87 | 5.20 | 2.26 | .24 | 34.8 |
| | 1-1/4" | M33 | | | | | | | | |
| | 1-3/8" | M36 | | | | | | | | |
| | 1-1/2" | M39 | | | | | | | | |
| | | | | | | | | | | |
| ENS2-2 | 1-1/8" | M30 | 5.43 | 12.36 | 4.49 | .91 | 5.55 | 2.26 | .24 | 35.3 |
| | 1-1/4" | M33 | | | | | | | | |
| | 1-3/8" | M36 | | | | | | | | |
| | 1-1/2" | M39 | | | | | | | | |
| | 1-5/8" | M42 | | | | | | | | |
| ENS3-1 | 1-3/4" | M45 | 7.48 | 15.98 | 5.20 | 1.10 | 7.44 | 3.17 | .32 | 92.6 |
| | 1-7/8" | M48 | | | | | | | | |
| | 2" | M52 | | | | | | | | |
| ENS3-2 | 1-3/4" | M45 | 7.48 | 16.38 | 5.71 | 1.18 | 7.84 | 3.17 | .32 | 93.7 |
| | 1-7/8" | M48 | | | | | | | | |
| | 2" | M52 | | | | | | | | |
| | 2-1/4" | M56 | | | | | | | | |
| ENS3-3 | 1-3/4" | M45 | 7.48 | 16.77 | 6.30 | 1.24 | 7.87 | 3.17 | .28 | 94.8 |
| | 1-7/8" | M48 | | | | | | | | |
| | 2" | M52 | | | | | | | | |
| | 2-1/4" | M60 | | | | | | | | |
| | 2-1/2" | M64 | | | | | | | | |
| ENS4-1 | 2-3/4" | M76 | 9.25 | 18.66 | 7.44 | 1.44 | 9.25 | 4.35 | .16 | 160.9 |
| | 3" | M80 | | | | | | | | |
| ENS4-2 | 2-3/4" | M76 | 9.25 | 19.49 | 8.62 | 1.61 | 9.50 | 4.35 | .12 | 165.4 |
| | 3" | M80 | | | | | | | | |
| | 3-1/4" | M85 | | | | | | | | |
| | 3-1/2" | M90 | | | | | | | | |

Product Development is constantly taking place and dimensions may change without prior notice.



Bolting and Machining the World's Critical Joints

1-800-779-2658

www.integratechnologies.com